

SKU: SQS25'-5"-7G-BZ

### General Description:

**Pole Top Options:** A removable pole cap is provided if the pole is drilled for attaching light fixtures. The drill pattern and drill orientation need to be provided by the customer unless EX-LITE fixtures are used for the project. If tenon option is selected, a 2-3/8" diameter tenon with 4" length is provided.

**Pole Shaft:** Electro-welded ASTM-A500 Grade C steel tubing with a minimum yield strength of 55,000 psi is used to fabricate the pole shaft.

**Handhole:** 3" X 6" size reinforced handhole is located at 12 inches from the base.


**Finish:** Commercial grade, super durable powder coat finish. Dark Bronze, White, Black, Gray and Green colors are provided at no extra charge. Other colors and custom color options are available at a surcharge.

**Anchor Bolts:** A set of 4 galvanized steel anchor bolts is provided with each pole assembly. Each anchor bolt includes 2 nuts and 2 washers. Top portion of the anchor bolt is threaded for securing and leveling the pole with the provided nuts and washers. An actual size paper anchor bolt template is provided.

**Base Cover:** Two pieces square aluminum base cover is available at a surcharge. Stainless steel screws are included to attach the 2 pieces together after pole installation.

**Other Options:** The following options are available: Custom tenon sizes, custom colors, electric/GFI outlets, custom pole heights, additional handholes and custom base plate dimensions.

**Foundation design:** Foundation should be designed by an engineer familiar with local soil and wind conditions as well as local code where the pole(s) will be installed.

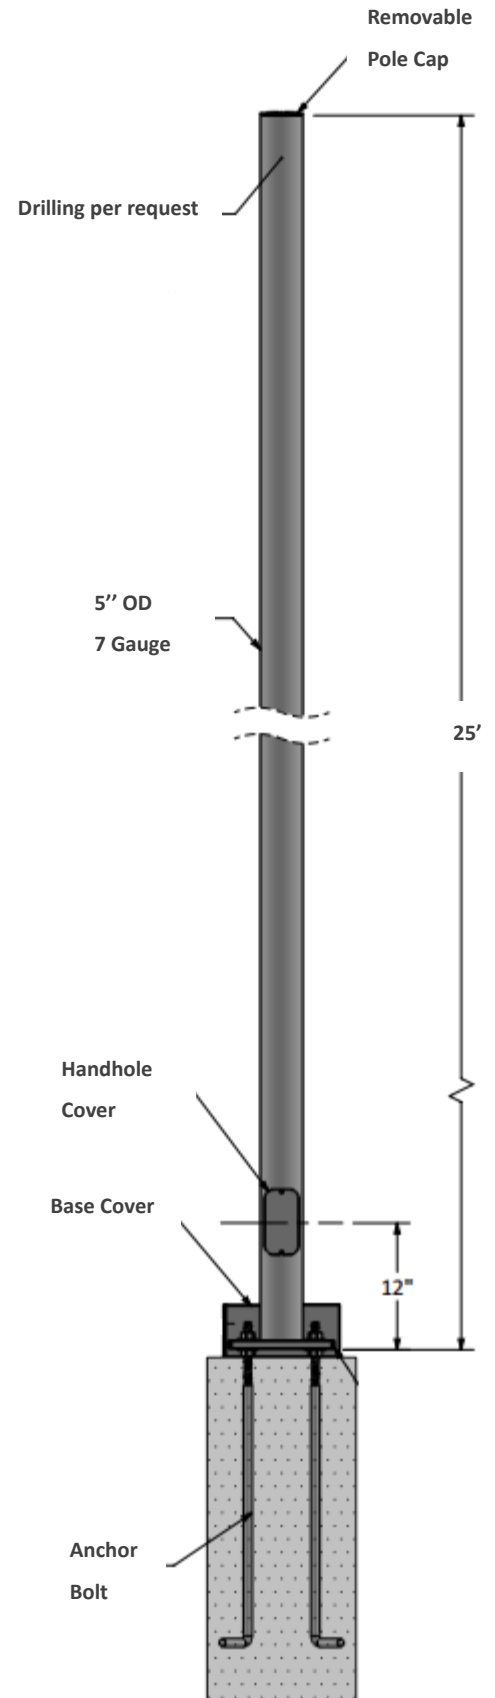

Pole Weight		Max EPA		
360lbs	80mph	90mph	100mph	
	18.5	13.3	9.5	
Base Template		Anchor Bolt		

**Disclaimer:** All dimensions and specifications are subject to change without any notice. Ex-Lite, Inc. is not responsible for any claims arising from improper loading (What is attached to the light pole), improper use, incorrect foundation design and/or installation.